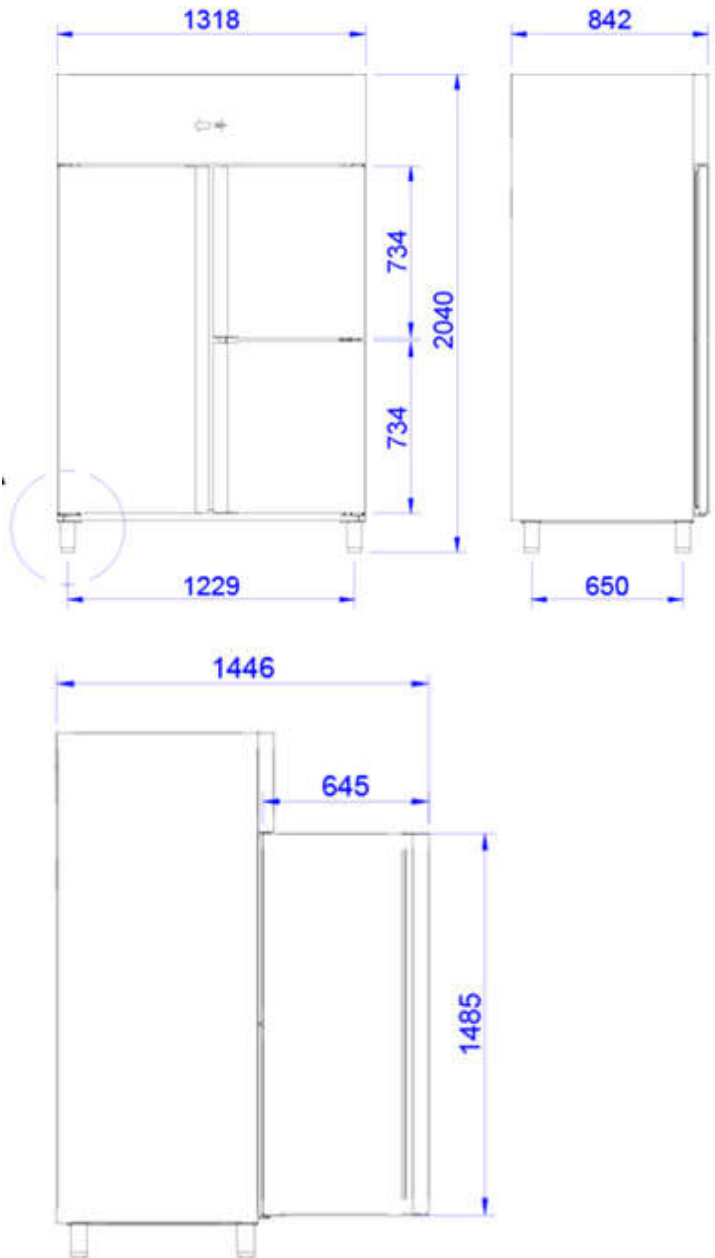



<p><b>Modell:</b> EKO 1370 (Zentralanschluss)</p>	<p><b>ELITE-LINE</b>                  Kühl- und Tiefkühlschränke</p>
<p><b>Beschreibung:</b>                  2-türiger Umluft-Kühlvitrine mit Glastüren und Griff, mit Schloss. Innen und außen in CNS inkl. Rückwand. Innenraum mit gerundeten Ecken und Kanten sowie 23 seitlich eingepressten Auflagesicken (Abstand 55 mm). Mit Reinigungsablauf. LED-Beleuchtung. CNS-Füße 132-192 mm hoch. Temperaturbereich 0°C/+8°C. Isolierung 60 mm, FCKW- und HFCKW-frei. Maschinenfach oben für Zentralanschluss ohne Kompressor, Kondensator, Magnet- und Expansionsventil. Benötigte Kälteleistung 436 W bei -10°C VT. Umluftverdampfer oben unter der Decke mit autom. Abauung und Tauwasserverdunstung an der Rückwand. Elektronische Regelung EVCO mit digitaler Anzeige und HACCP-Speicher. Spannung 230 V 50 Hz. Nennaufnahme 125 W . Zubehör: 6 Roste, rilsaniert GN 2/1. Abmessungen: 1318 x 842 x 2040 mm (BxTxH)</p>	
<p><b>Zeichnungen:</b></p>  <p>The technical drawings show the following dimensions:</p> <ul style="list-style-type: none"> <li>Front view: Total width 1318 mm, total height 2040 mm, depth 650 mm. The two doors are each 734 mm high.</li> <li>Side view: Total width 1446 mm, depth 645 mm, and a height of 1485 mm for the main body.</li> <li>Top view: Total width 1229 mm.</li> </ul>	<p><b>Bild:</b></p>  <p>The photograph shows the exterior of the stainless steel refrigerator with two glass doors and a digital display on top. The interior view shows a clean, empty space with several wire shelves and a side rack on the right.</p>